



BB5 USER INSTRUCTIONS

Thank you for purchasing the JUMP BB5 battery bank. Always follow basic safety precautions when using electrical appliances. Read all instructions carefully. Please keep this instruction manual for easy reference.



- ① Input - Charge - USB-C - 5V 2.4A/9V 2A/12V 1.5A
- ② Output USB - 5V 4.5A/4.5V 5A/9V 2A/12V 1.5A
- ③ Output Lightning Cable - 5V 2.4A
- ④ Battery level/charging indicator
- ⑤ Output - Micro USB Adapter
- ⑥ Output USB-C Cable - 5V 3A/9V 2.2A/12V 1.67A

LED Status Indicator



Charging Level


1-4 all lit up	Fully charged
1 blink	0% - 25%
2 blink	26% - 50%
3 blink	51% - 75%
4 blink	76% - 99%

Battery Level

1-4 all off	Empty
1 on	0% - 25%
2 on	26% - 50%
3 on	51% - 75%
4 on	76% - 99%


Charging the BB5

The BB5 must be charged from a 5V 2 to 3 A charger with a 1.5 - 2 hours charging time. Use the USB-C Charge Input for charging. Do not charge from a PC or Laptop USB port, as these generally do not have sufficient current for charging purposes.

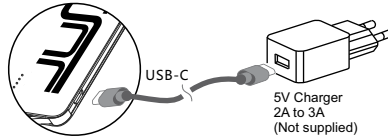

Built-in output cables

The built-in USB-C and Lightning cables conveniently charge devices with corresponding connectors. They support fast charging with high current capability. After charging, the connector must be re-seated into the receptacle for safe and easy transportation.

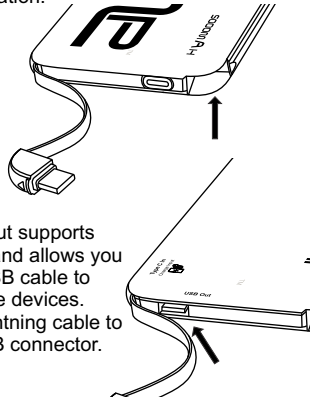

USB output

The USB output supports fast charging and allows you to plug in a USB cable to charge suitable devices. Unplug the lightning cable to reveal the USB connector.

WARRANTY INFORMATION

1. Sanji Electronics (Pty) Ltd offer a limited warranty for this product against any defects in material and workmanship for a period of 24 months from the date of purchase by the end user/consumer. The conditions of the warranty are as follows:
2. The warranty is only valid upon presentation of the original receipt (from dealer/retailer) by the original purchaser with the product to be repaired or replaced.
3. The warranty is void if the serial number, date of purchase and label have been removed.
4. The warranty does not cover damage or product failure resulting from normal wear and tear, physical abuse, improper installation, misuse, modification or repairs by unauthorized third parties.
5. We do not assume responsibility for any loss or damage incurred during shipment or as a result of a force majeure.
6. We are not liable for any incidental or consequential damages arising from the use or misuse of this product.
7. All warranty claims are limited to repair or replacement of the defective product and at the sole discretion of Sanji Electronics (Pty) Ltd.
8. If we repair or replace the product, the product will be covered for the remaining time of the original warranty period.
9. Consumable components such as batteries are not covered by the warranty.

Specifications:

Built-in USB-C and Lightening cables.

Input Charging: Type-C 5V 2.4A/9V 2A/12V 1.5A

Output 1: USB 5V 4.5A/4.5V 5A/9V 2A/12V 1.5A

Output 2: Type-C Cable 5V 3A/9V 2.2A/12V 1.67A

Output 3: Micro USB Cable via built-in adapter.

Output 4: Lightning Cable 5V 2.4A

Charging time: 1.5 - 2 Hours.

Battery: 5000mAh Class A Lithium Polymer.

Output at 5V: 3250mAh

Unit size: 139*69*9.8mm

Unit Weight: 117g

Contents:

Jump BB5 / User Instructions


Charging cable - USB to USB-C



Sanji Electronics (Pty) Ltd, 39 Kyalami Boulevard,
Kyalami Business Park, Gauteng, South Africa.

Using the Micro USB Plug

Unplug the USB-C cable and plug it into the USB-C to Micro converter (located under the cable), then pull it out. You can now charge Micro USB devices. When you are finished, unplug the converter plug and push it back into the receptacle.



Discharge Status

Plug one of the built-in output cables or a USB cable into a suitable device to check the battery's discharge status. Once plugged in, the LEDs will switch on, and you will see the battery levels. The LEDs will auto-switch off after a while when unplugged. Alternately, plug a USB-C charger cable into the USB-C input. The LEDs will switch off when the device being charged is fully charged.



Safety Low Voltage Shutdown

The BB5 should be fully charged after use and at least every six months when not in use. If left without any charging for an extended period, the internal battery voltage will drop, and if it falls below the safety threshold, the internal shutdown will activate. Once activated, the internal shutdown will prevent the product from being used.



DANGER




If not handled properly, there is a risk of death or serious injury and the risk is high.

WARNING

1. Read the instruction manual carefully before using this unit.
2. Caution while using this unit.
3. Not to be used by young or infirm persons without supervision.
4. Only charge the BB5 with suitable USB chargers.
5. Do NOT allow the product to get wet.
6. Do NOT immerse the product in water.
7. Do NOT operate the product in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.
8. Do not put it in the fire or heat it in a microwave or oven device.
9. Do not use in blankets, quilts, backpack and other areas with poor ventilation.
10. Do NOT modify or disassemble BB5. Only an authorized repair technician may repair this unit.
11. Do NOT expose product to extreme heat or fire.
12. Do NOT drop unit. If unit receives a sharp blow or is otherwise damaged in any way, have it checked by a qualified battery technician.
13. Do NOT store in locations where the temperature may exceed 40°C
14. Charge only at ambient temperature between 0°C and 30°C.
15. Do not charge external devices at the same time from the mobile battery.
16. If this unit is leaking liquid, dispose of it at a proper recycle facility immediately.
17. Under extreme conditions, battery leakage can occur. If a liquid is noticed coming from product do not handle with bare hands. In case of skin contact wash with soap and water immediately. If liquid comes in contact with eyes rinse eyes with cold running water for at least 10 minutes and get medical attention immediately.
18. Product contains lithium based battery. At the end of the product life dispose of the product according to local regulations.

USER INSTRUCTIONS

BBS

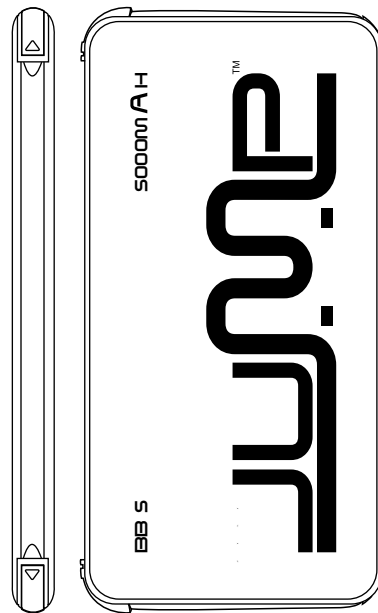

**BATTERY BANK WITH
BUILT-IN CABLES**